



ABOVEGROUND/UNDERGROUND TANKS

BUILT WITH PRECISION USING STATE-OF-THE-ART TECHNOLOGY

Backed by Worthington's 70-years of manufacturing expertise and operational scale, our certified team ensures every tank meets the highest standards of safety, durability, and performance.







GENERAL SPECIFICATIONS

- Designed and built to ASME Section VIII, Division 1
- Complies with NFPA 58
- Registered with national board
- Rated at 250 PSI from -20° to 125°F
- Vacuum purged - Ready to fill
- Rego valves
- Rochester liquid level gauges standard with steel gears and snap on dial Superior
- Powder coated finish
- Aboveground / Underground black plastic shroud and lid or galvanized domes included with purchase

Standard WG offering: 500 & 1000

WG standard colors: red/white



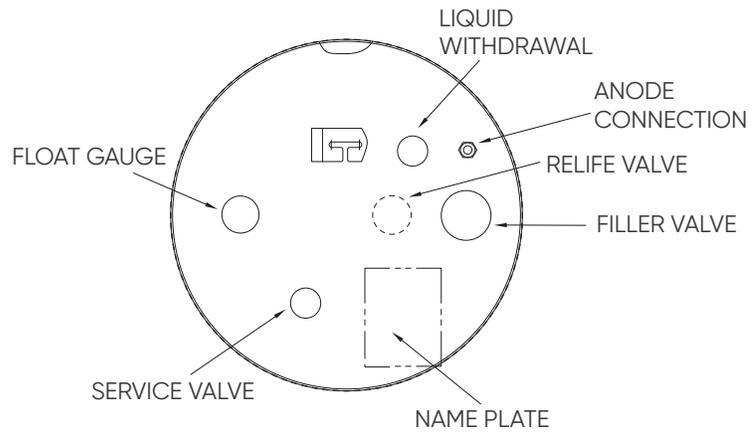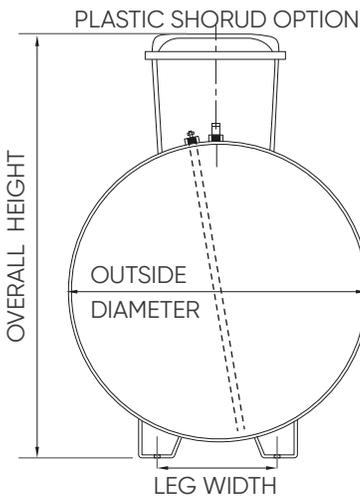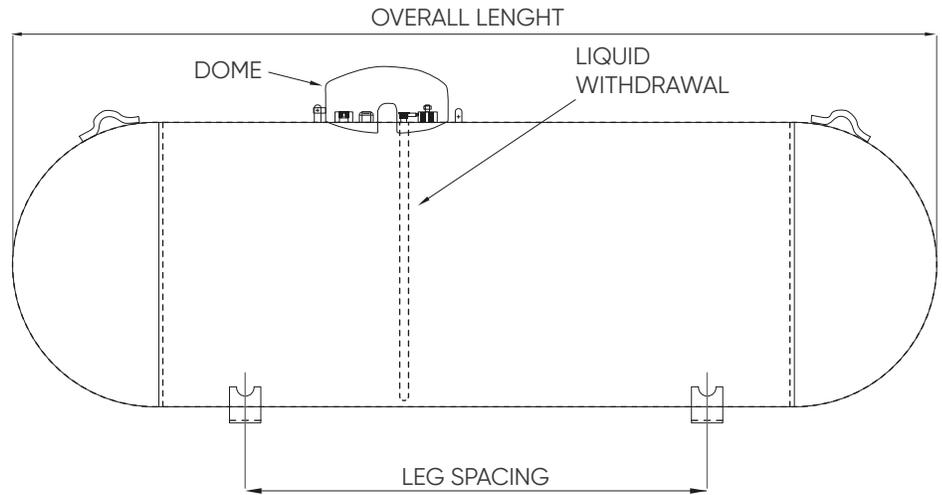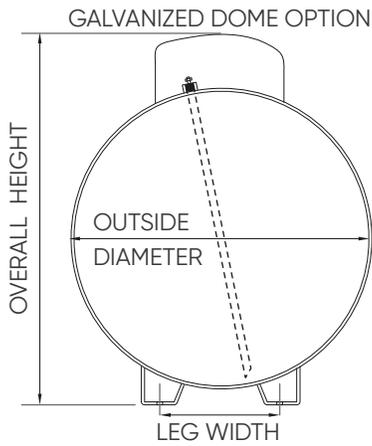

Model/Size (gal)	500	1000
Water Capacity (wg)	500	1000
Outside Diameter (in)	37.4	40.9
Overall Length (in)	117.6	192.1
Overall Height with Plastic Shorud (in)	54.25	58
Overall Height with Galvanized Dome (in)	46.2	58
Leg Width (in)	15	16.25
Leg Spacing (in)	60	108.1
Empty Weight (lbs)	904	1720
Head Type	HEMI	HEMI
Full Load Quantity	30	6
Per Stack Quantity	15	5

All vessel dimension are approximate
 *Drain plug is not available