ABOVEGROUND/UNDERGROUND TANKS

RELIABLE STORAGE YOU CAN DEPEND ON



GENERAL SPECIFICATIONS

- Designed and built to ASME Section VIII, Division 1
- Complies with NFPA 58
- Registered with national board
- Rated at 250 PSI from -20° to 125°F
- Vacuum purged
- Rego valves
- Powder-coated finish
- Aboveground: plastic or steel lids available
- Underground: black plastic shroud included with purchase

Standard offering: 500 WG & 1000 WG

Standard colors: red/white


Designed and manufactured by a third party. Distributed by Worthington Enterprises.


200 Old Wilson Bridge Road
Columbus, Ohio 43085


P: +1.614.438.7930
Toll-free: 866.928.2657
worthingtonenterprises.com/heatingtanks


WORTHINGTON ENTERPRISES

© Worthington Enterprises 11/26

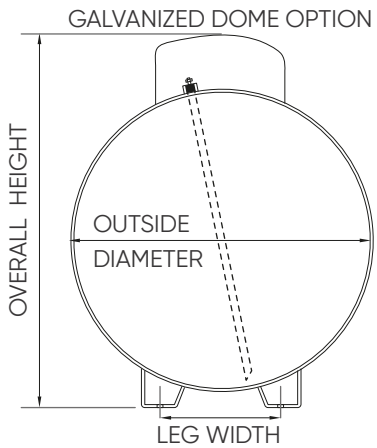

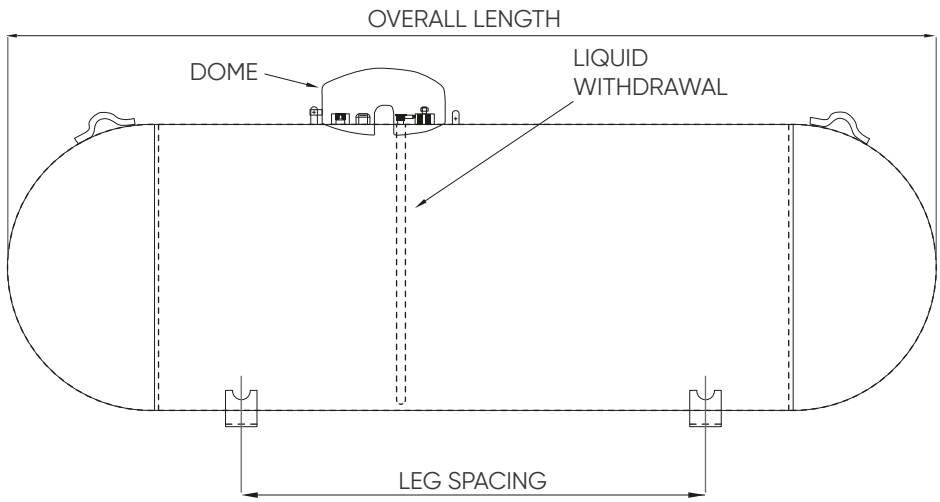

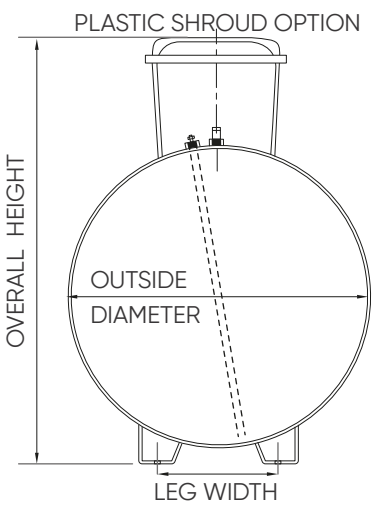

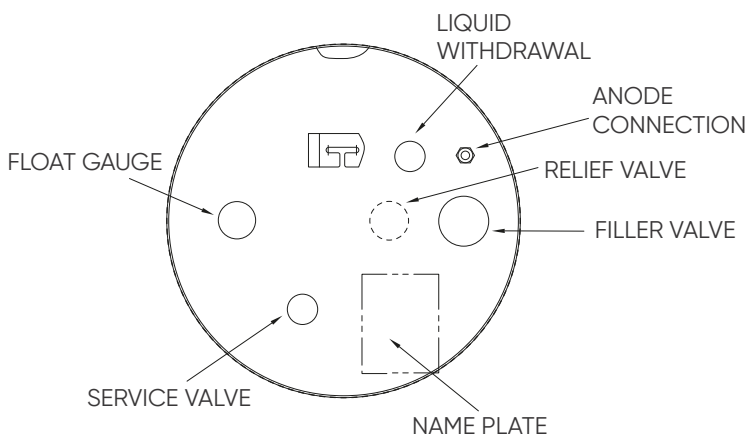

Model/Size (gal)	500	1000
Water Capacity (wg)	500	1000
Outside Diameter (in)	37.4	40.9
Overall Length (in)	117.6	192.1
Overall Height with Plastic Shorud (in)	54.25	58
Overall Height with Galvanized Dome (in)	46.2	58
Leg Width (in)	15	16.25
Leg Spacing (in)	60	108.1
Empty Weight (lbs)	904	1720
Head Type	HEMI	HEMI
Full Load Quantity	30	6
Per Stack Quantity	15	5

All vessel dimension are approximate

Designed and manufactured by a third party. Distributed by Worthington Enterprises.

200 Old Wilson Bridge Road
Columbus, Ohio 43085

P: +1.614.438.7930
Toll-free: 866.928.2657
worthingtonenterprises.com/heatingtanks

WORTHINGTON ENTERPRISES

© Worthington Enterprises 11/26