

## INNOVATIVE TECHNOLOGY DESIGNED TO MAKE TANK MONITORING EASIER THAN EVER.

Featuring Otodata's state-of-the-art monitoring technology protected by a durable lid, SmartLid is the cutting-edge integrated lid and tank monitor solution that keeps service calls to an absolute minimum.

# EASY TO INSTALL.

The lid arrives with the monitor pre-activated, making installation in the field quick and easy with no tools needed.

**SMARTLID** 

### EASY TO USE.

With a strong signal, long battery life and a convenient user-friendly app, you'll never be far from the accurate tank

### EASY TO SELL.

SmartLid will transform your Worthington Industries vertical and horizontal tanks in ways that will boost sales and separate yourself from competition.



# LESS GUESSWORK. LESS SERVICE CALLS. MORE PEACE OF MIND.

Combining cuttinge-edge monitoring technology with Worthington Industries' legendary reliability, SmartLid is designed with you in mind.




### **FEATURES**

- Quick and easy installation, no tools needed
- Waterproof polypropylene casing
- Long-lasting lithium thionyl chloride battery with super capacitor
- Clipped-in monitor ensures strongest signal
- Fits most horizontal above-ground tanks

## PUT A LID ON UNNECESSARY SERVICE TRIPS

- Longest battery life in the industry
- Dual SIM and LTE technology for maximum coverage
- Automatic network updates for easier management
- Unlimited reports and alerts
- An app delivering real-time gas level data

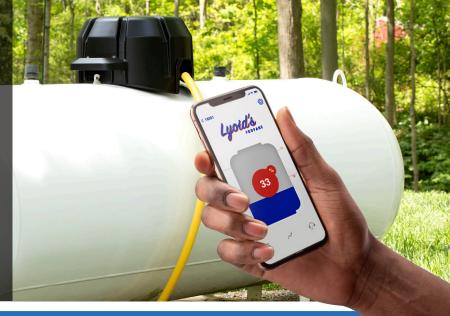

### SMARTLID SPECS

### STANDARD

| mensions                   | 20.7 in x 16.4 in x 10.3 in     | 525.8  |
|----------------------------|---------------------------------|--------|
| l Weight                   | 3.5 lbs                         | 1.6 kg |
| ellular Technology         | Dual SIM with CAT-M and NB-IoT  | Dual   |
| nsor & Gauge Input         | Level                           | Leve   |
| wer Inputs                 | Hybrid LTC 7.2 VDC, LTC 3.6 VDC | Hybr   |
| ittery life                | ~ 15 years                      | ~ 15 ງ |
| porting Schedule           | Unlimited, configurable         | Unlin  |
| aterial                    | Polypropylene                   | Polyp  |
| perating Temperature Range | -22 F to 140 F                  | -40 (  |

200 OLD WILSON BRIDGE ROAD COLUMBUS, OHIO 43085 P: 614.438.7930

Dim Lid

Cel Ser

Pov Bat

Rep Ma<sup>r</sup>

Op

TOLL-FREE: 866.928.2657 CUSTOMERSERVICE@WORTHINGTONENTERPRISES.COM WORTHINGTONENTERPRISES.COM/SMARTLID



525.8 mm x 416.6 mm x 261.6 mm 1.6 kg Dual SIM with CAT-M and NB-IoT Level Hybrid LTC 7.2 VDC, LTC 3.6 VDC ~ 15 years Unlimited, configurable Polypropylene -40 C to 60 C

