ABOVEGROUND TANKS

RELIABLE STORAGE YOU CAN DEPEND ON



GENERAL SPECIFICATIONS

- Designed and built to ASME Section VIII, Division 1
- Complies with NFPA 58
- Registered with national board
- Rated at 250 PSI from -20° to 125°F
- Vacuum purged
- Rego valves
- Powder-coated finish
- Steel or plastic lids available

Standard offering: 250 WG, 500 WG, & 1000 WG
Standard colors: white/tan/gray


Designed and manufactured by a third party. Distributed by Worthington Enterprises.

200 Old Wilson Bridge Road
Columbus, Ohio 43085

P: +1.614.438.7930
Toll-free: 866.928.2657
worthingtonenterprises.com/heatingtanks

WORTHINGTON ENTERPRISES

© Worthington Enterprises 11/26

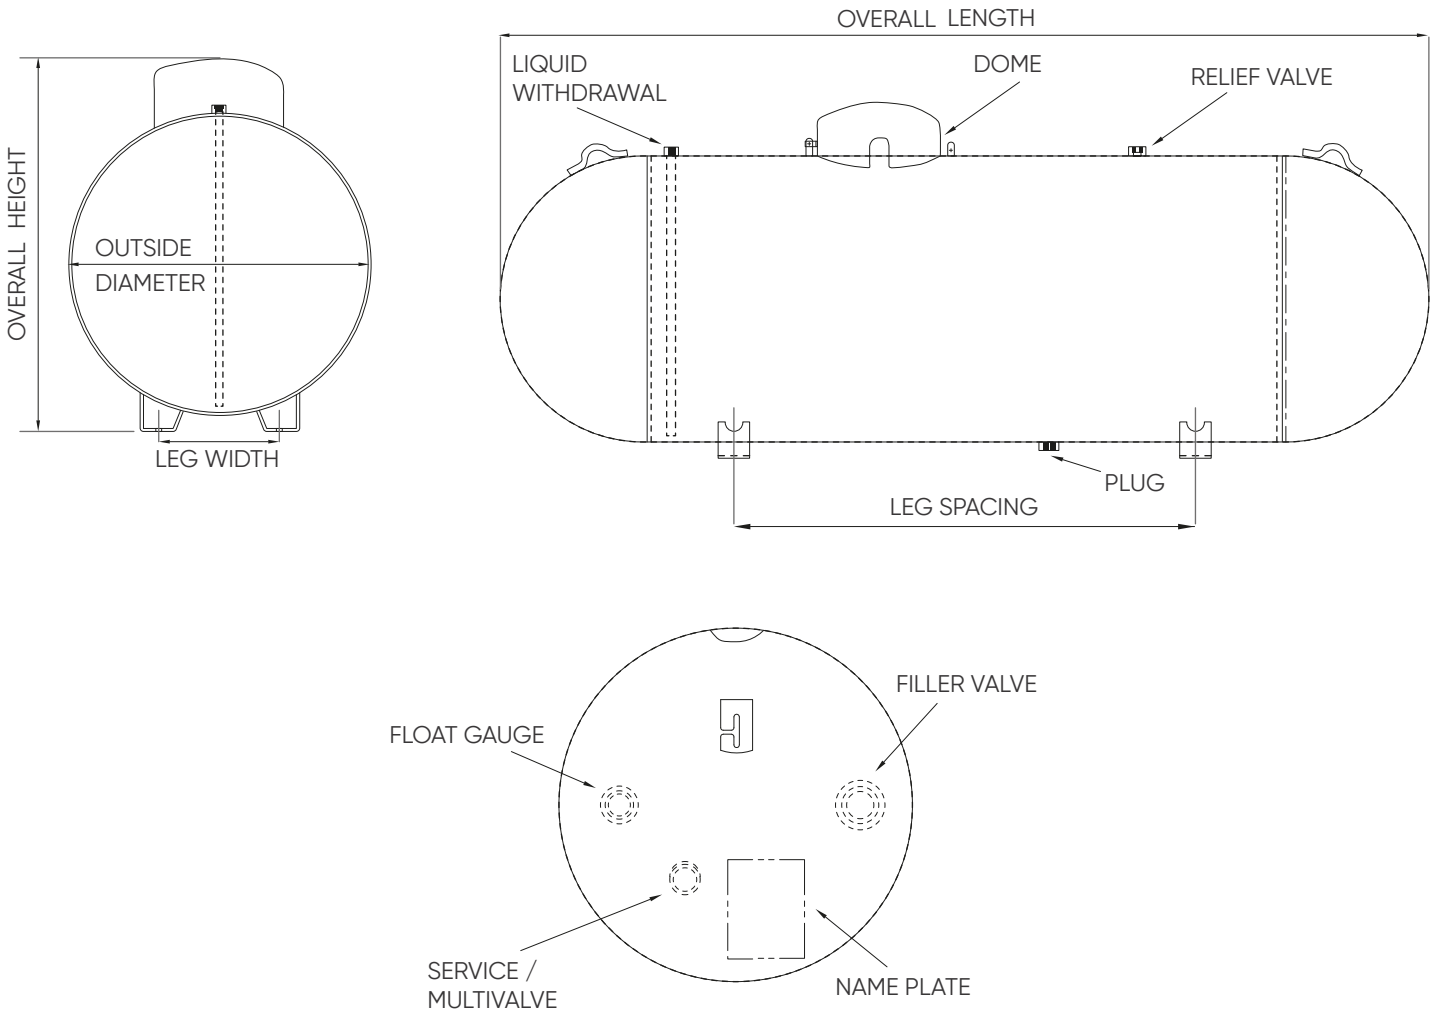

Model/Size (gal)	250	500	1000
Water Capacity (wg)	250*	500	1000
Outside Diameter (in)	31.5	37.4	40.9
Length (in)	88.1	117.6	192.1
Height (in)	39.4	46.2	49.8
Leg Width (in)	12.75	15	16.25
Leg Spacing (in)	42	60	108.1
Empty Weight (lbs)	473	904	1720
Head Type	HEMI	HEMI	HEMI
Full Load Quantity	63	30	15
Per Stack Quantity	9	6	5

All vessel dimension are approximate
*Drain plug is not available

200 Old Wilson Bridge Road
Columbus, Ohio 43085

P: +1.614.438.7930
Toll-free: 866.928.2657
worthingtonenterprises.com/heatingtanks

WORTHINGTON ENTERPRISES

© Worthington Enterprises 11/26